



ZEN™ 3D PRO



INSTALLATION MANUAL | CZ-680/ZEN 3D PRO

Assembly Instructions


- 1 CZ-680 massage chair arrives in three boxes.** The base is packed in box 1, the backrest is packed in box 2, and the side boards are packed in box 3. As pictured below.



Box 1: The Base



Box 2: Backrest

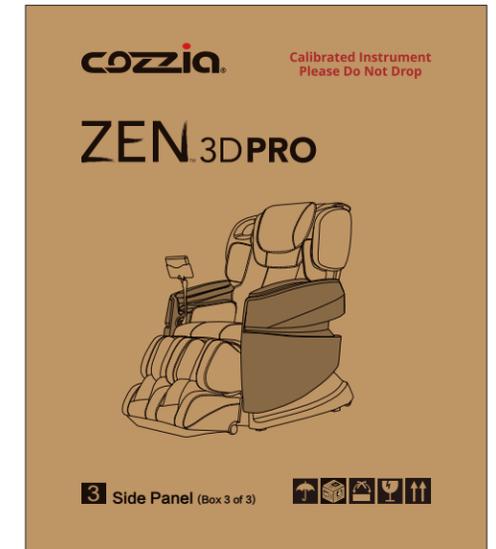

Box 3: Side Boards

- 2 Open box 1 and remove all the packing materials.** Take the base out of the box and get rid of the plastic bag which covers the base. As pictured below.



- 3 Take the tablet holder from the footrest, remove the packing material and set aside.** The accessory box includes the power cord, user manual, instruction manual, warranty card, and arm hardware. As pictured below.



- 4** **Cut the cable tie, which is used to secure the backrest actuator while shipping.** Remove the protective material that is wrapped on the backrest actuator. Remove the cotter pin and bolt and set aside. As pictured below.



Remove the protective material.



Remove the cotter pin and bolt and set aside.

- 5** **Open box 2 and remove packing materials.** Take the backrest out of the box and set it on the floor. DO NOT pull on the air hose. DO NOT pull on the backrest cable. DO NOT pull on the pillow, or damage could occur.



- Remove the two screws.
- Remove the cardboard.

- 6** **Preferably using two people, carefully set the backrest on the cradle points on the base.** With the backrest in a vertical position, ensure it properly engages to the base.

Caution: DO NOT rest the backrest onto floor while it is vertical otherwise damage to the backrest bracket may occur.



Make sure the backrest is properly engaged to the base

- 7** **Push the backrest forward and let it lean on the seat pad.** Use the bolt and cotter pin to attach the backrest and backrest actuator.



Align the two brackets.




Attach backrest bracket to reclining actuator.



Lock the bolt by cotter pin.

8 Connect the backrest 4-way air hose connector to the air pump box.

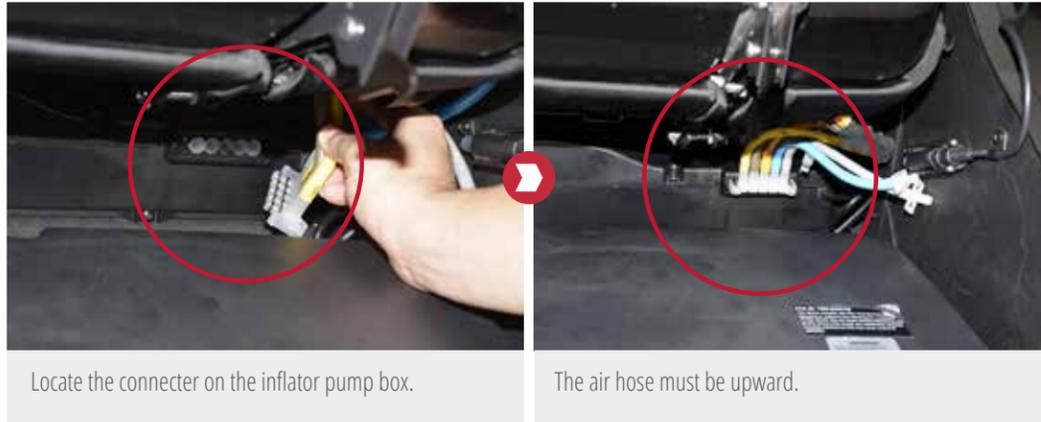

9 **Locate connector on PCB tray.** Securely attach the backrest harness to PCB tray and lock it by screws on the connector.



10 Recline the backrest until it locks into position.



11 **Open box 3 and remove the two side boards.** Locate the two zipper heads at bottom edge of the side board. Unzip these two zipper heads to both ends. On the side board, there are two metal plates. Locate the hole under each metal plate. As pictured below.



12 Connect the air hose to their appropriate connectors. Carefully attach the side board onto the base. Align and insert the two metal bars on the base into the holes under the metal plate. As pictured below.



13 Use the two socket hexagon head screw to fix the side board to the base. Then zip the zipper. As pictured below.



14 Remove the protective cloth strips on the backrest pad and attach the backrest pad onto backrest. Attach the zipper to the backrest pad. Then attach the pillow. As pictured below.



- 15** Attach the remote control holder onto right side armrest. Then attach the tablet onto the holder. As pictured below.



- 16** Connect the chair to a power supply, then turn on the power switch. Now you can enjoy your massage chair!

